


## COLOR PVC CARDS

Ideal to highlight your offers & promotions

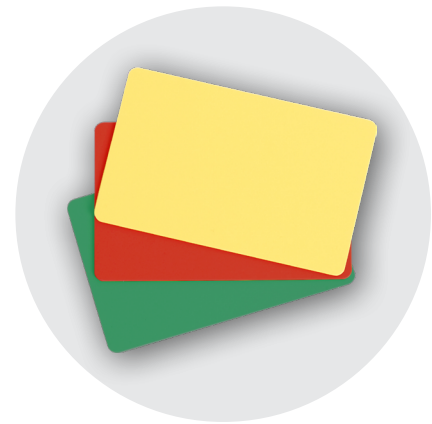

Evolis PVC cards are the ideal support for outstanding printouts. Their even and flat surface ensures flawless moves under the print head (minimizing the risk of damage) and printouts with vivid colors and well-defined barcodes.

Color PVC cards are the perfect choice for price tag labelling when you need to highlight specific messages. Use them with Evolis High Trust® monochrome ribbons to bring a twist to your shelves!

### ADVANTAGES


Color cards are an easy and aesthetic way to manage your communication and to add color to monochrome prints, making your tags more distinctive and noticeable. They are ideal to highlight your offers and promotions: Today's Special, Offer of the week, Organic produce, Locally sourced, Gluten free, Recommended, etc.

Made from PVC, they are flexible but very resistant and solid.

Tested and validated by Evolis R&D and Quality departments, these consumables bring you printing quality and reliability.

### GENERAL SPECIFICATIONS

- Cards in PVC – Blank solid color PVC – Mirror finish
- Compliant with ISO CR-80 (ISO 7810) standards
- Dimension: 85.6 mm x 54 mm (3 3/8" x 2 1/8")
- Thickness: 0.76 mm / 30 mil



### PRODUCT INFORMATION:

- PVC Cards
- Colors: Red, Green, Yellow
- 30 mil



## COMPATIBILITY AND PACKAGING

PART#	COLOR	PANTONE CODE	PACKAGE	ZENIUS / PRIMACY	PRIMACY2	EDIKIO ACCESS	EDIKIO FLEX	EDIKIO DUPLEX
C4301	RED	PMS 200	1 box of 100 cards	•	•	•	•	•
C4401	GREEN	PMS 3415	1 box of 100 cards	•	•	•	•	•
C4101	YELLOW	PMS 102	1 box of 100 cards	•	•	•	•	•

## STORAGE INFORMATION

The cards shall be capable of functioning for up to 2 years after purchase if stored in a cool, dry environment and having remained unopened from the original packaging.

Temperature of storage must be between 15-30°C (59-86°F) and at RH between 10-60%. Once opened, avoid dust, direct sunlight, high humidity and high temperatures.

Do not place near solvent or other chemicals.

## INSTRUCTIONS FOR USE

In order to optimize the printing quality and card durability:

- Do not use cards that have been damaged, folded or dropped on the floor.
- Do not touch the printable surface of the cards in order to preserve print quality.
- Do not expose tags to strong sources of heat (deterioration possible from 60 °C / 140 °F). Avoid thermal shocks.
- Avoid putting the printed labels in contact with fatty substances.
- Do not clean the tags in a machine, with boiling water or abrasive detergent products. Preference should be given to cleaning with warm water (<60°C / 140°F) or with a neutral detergent diluted with water, and a microfibre cloth. Dry the tags thoroughly before using them.